

Estimated kerf-width compensation

The widths in the tables below are for reference. The data are obtained with the “Best Quality” settings. Differences between installations and material composition may cause actual results to vary from those shown in the tables.

Estimated kerf-width compensation – Metric (mm)

Process	Thickness (mm)										
	0.5	1	2	3	6	8	10	12	16	20	25
Mild Steel											
105 A Shielded					2.1	2.2	2.2	2.2	2.5	2.7	3.3
85 A Shielded				1.7	1.8	1.9	2.0	2.2	2.4	2.6	
65 A Shielded			1.6	1.6	1.8	1.9	2.0	2.2	2.3		
45 A Shielded	1.1	1.1	1.4	1.5	1.7						
FineCut	0.7	0.7	1.3	1.3							
Low Speed FineCut	0.6	0.8	0.7	1.3							
105 A Unshielded					2.1	2.2	2.2	2.2	2.5	2.7	3.3
85 A Unshielded			1.7	1.8	1.9	2.0	2.1	2.1	2.3		
65 A Unshielded			1.6	1.6	1.7	1.8	1.9	2.0			
45 A Unshielded	0.5	0.9	1.3	1.3							
Stainless Steel											
105 A Shielded					1.9	2.1	2.3	2.3	2.3	2.6	2.9
85 A Shielded				1.6	1.8	1.9	2.1	2.3	2.4	2.5	
65 A Shielded			1.4	1.5	1.8	1.9	2.0	2.2	2.4		
45 A Shielded	0.9	1.1	1.5	1.6	1.8						
FineCut	0.6	0.6	1.0	1.4							
Low Speed FineCut	0.7	0.6	1.3	1.4							
105 A Unshielded					2.0	2.2	2.4	2.5	2.7	2.7	3.1
85 A Unshielded			1.7	1.7	1.8	1.9	2.1	2.2	2.4		
65 A Unshielded			1.6	1.6	1.8	1.8	1.9	2.0			
45 A Unshielded	0.5	1.0	1.3	1.5	1.5						
Aluminum											
105 A Shielded					2.3	2.3	2.4	2.6	2.7	3.0	3.5
85 A Shielded				2.0	1.9	2.0	2.1	2.2	2.4	2.6	
65 A Shielded			1.9	1.9	1.9	2.0	2.1	2.3	2.5		
45 A Shielded		1.5	1.5	1.6	1.5						
105 A Unshielded					2.2	2.4	2.5	2.6	2.7	3.0	3.3
85 A Unshielded			1.9	1.9	1.9	2.0	2.0	2.1	2.2		
65 A Unshielded			1.8	1.8	1.8	1.8	1.9	2.0			
45 A Unshielded		1.6	1.5	1.4	1.5						

MACHINE TORCH SETUP


Estimated kerf-width compensation – English (inches)

Process	Thickness (inches)										
	22GA	18GA	14GA	10GA	3/16	1/4	3/8	1/2	5/8	3/4	1
	Mild Steel										
105 A Shielded						0.083	0.088	0.089	0.100	0.101	0.133
85 A Shielded				0.068	0.071	0.073	0.078	0.090	0.095	0.100	
65 A Shielded			0.062	0.065	0.068	0.070	0.076	0.088	0.090	0.091	
45 A Shielded	0.035	0.054	0.055	0.061	0.065	0.066					
FineCut	0.024	0.043	0.049	0.051							
Low Speed FineCut	0.025	0.031	0.027	0.051							
105 A Unshielded						0.083	0.097	0.098	0.107	0.111	0.125
85 A Unshielded				0.070	0.073	0.075	0.080	0.085	0.090		
65 A Unshielded			0.062	0.064	0.066	0.068	0.075	0.081			
45 A Unshielded	0.020	0.050	0.051	0.054	0.057	0.059					
Stainless Steel											
105 A Shielded						0.076	0.089	0.091	0.092	0.099	0.113
85 A Shielded				0.065	0.068	0.070	0.080	0.094	0.095	0.096	
65 A Shielded			0.056	0.062	0.068	0.073	0.076	0.090	0.093		
45 A Shielded	0.032	0.055	0.058	0.067	0.069	0.069					
FineCut	0.018	0.036	0.040	0.055							
Low Speed FineCut	0.025	0.023	0.021	0.055							
105 A Unshielded						0.080	0.095	0.101	0.106	0.104	0.122
85 A Unshielded			0.066	0.068	0.070	0.072	0.080	0.090	0.095		
65 A Unshielded			0.061	0.064	0.067	0.070	0.072	0.080			
45 A Unshielded	0.020	0.054	0.052	0.060	0.058	0.058					
Aluminum											
		1/32	1/16	1/8	3/16	1/4	3/8	1/2	5/8	3/4	1
105 A Shielded						0.091	0.092	0.102	0.107	0.111	0.138
85 A Shielded				0.080	0.078	0.075	0.080	0.090	0.095	0.100	
65 A Shielded			0.073	0.074	0.075	0.076	0.083	0.091	0.100		
45 A Shielded		0.059	0.061	0.065		0.060					
105 A Unshielded						0.089	0.098	0.102	0.106	0.117	0.132
85 A Unshielded				0.075	0.075	0.075	0.080	0.082	0.088		
65 A Unshielded			0.070	0.070	0.070	0.070	0.072	0.079			
45 A Unshielded		0.062	0.058	0.057		0.061					

105 A Shielded consumables




220993
Shield




220854
Retaining cap




220990
Nozzle




220842
Electrode



220994
Swirl ring




220993
Shield




220953
Ohmic-sensing
retaining cap




220990
Nozzle



220842
Electrode



220994
Swirl ring



MACHINE TORCH SETUP

105 A Shielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	3.2	6.4	200	0.5	4140	144	5090	145
8				0.75	3140	145	3870	145
10					2260	145	2790	145
12					1690	145	2060	148
16				1.0	1060	149	1310	149
20		780	152		940	152		
25		Edge Start			550	159	580	158
30					370	162	410	161
32					350	166	370	161
35					290	168	320	165
40	190				173	210	170	

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
1/4	0.125	0.25	200	0.5	156	144	192	145	
3/8				0.75	94	145	116	145	
1/2					62	146	76	148	
5/8					1.0	42	149	52	149
3/4				33		151	40	150	
7/8		1.25	26	154	30	157			
1			Edge Start			21	160	22	158
1-1/8						15	162	17	160
1-1/4	14	166				15	161		
1-1/2	9	171				10	168		

105 A Shielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	3.2	6.4	200	0.5	4870	139	6000	141
8					3460	141	4210	142
10					2240	144	2670	142
12				1490	148	1860	144	
16		0.75	950	149	1080	149		
20		8.0	250	1.25	660	154	810	152
25		Edge Start			440	158	530	156
30					340	164	360	160
32	300				166	320	163	

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/4	0.125	0.25	200	0.5	185	139	224	141
3/8					94	143	112	142
1/2					55	148	68	145
5/8				0.75	38	149	43	149
3/4		0.31	250	1.25	28	153	34	151
7/8		Edge Start			22	156	27	153
1					17	158	20	156
1-1/8					14	162	16	159
1-1/4	12	166	13	163				

MACHINE TORCH SETUP

105 A Shielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	3.2	6.4	200	0.5	5980	145	7090	144
8				0.75	4170	149	5020	148
10					2640	152	3280	151
12				1.0	1910	156	2450	154
16					1290	157	1660	155
20				1020	163	1190	162	
25		Edge Start			660	166	790	165
30					430	173	570	171
32					340	175	490	173


English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/4	0.125	0.25	200	0.5	223	146	265	145
3/8				0.75	110	151	136	150
1/2					1.0	71	156	91
5/8				51		157	66	155
3/4				43	162	50	161	
7/8				Edge Start			34	164
1		25	166				30	165
1-1/8		20	171				25	169
1-1/4		15	175				20	173

85 A Shielded consumables




220817
Shield




220854
Retaining cap





220816
Nozzle




220842
Electrode



220994
Swirl ring




220817
Shield




220953
Ohmic-sensing
retaining cap




220816
Nozzle



220842
Electrode



220994
Swirl ring



MACHINE TORCH SETUP

85 A Shielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
3	1.5	3.8	250	0.1	6800	122	9200	120
4				0.2	5650	122	7300	122
6				0.5	3600	123	4400	125
8					2500	125	3100	127
10					1680	127	2070	128
12		4.5	300	0.7	1280	130	1600	130
16				1.0	870	134	930	133
20		6.0	400	1.5	570	137	680	136
25		Edge Start			350	142	450	141
30		Edge Start			200	146	300	144

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
10GA	0.06	0.15	250	0.2	250	122	336	121
3/16				0.2	185	123	220	123
1/4				0.5	130	123	160	126
3/8					70	126	86	127
1/2					45	131	56	131
5/8		0.18	300	1.0	35	134	37	133
3/4				0.24	400	1.5	24	136
7/8		Edge Start			19	139	22	138
1		Edge Start			13	142	17	141
1-1/8		Edge Start			9	145	13	143
1-1/4	Edge Start			7	148	10	146	

85 A Shielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
3	1.5	3.8	250	0.1	7500	122	9200	120
4				0.2	6100	122	7500	120
6				0.5	3700	122	4600	122
8					2450	124	3050	124
10		4.5	300	0.5	1550	127	1900	126
12				0.7	1100	131	1400	130
16				1.0	700	135	760	134
20				Edge Start		480	138	570
25		Edge Start		300	143	370	141	

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
10GA	0.06	0.15	250	0.2	275	122	336	120	
3/16					200	122	240	121	
1/4				0.5	130	122	164	122	
3/8					65	126	80	125	
1/2		0.18	300	1.0	36	132	48	131	
5/8					28	135	30	134	
3/4				Edge Start		20	137	24	136
7/8				Edge Start		16	140	19	139
1		Edge Start		11	143	14	141		

MACHINE TORCH SETUP

85 A Shielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
3	1.5	3.8	250	0.1	8000	122	9400	121
4				0.2	6500	123	8000	123
6				0.5	3800	126	4900	126
8					2650	130	3470	129
10		4.5	300	0.7	1920	132	2500	131
12				0.7	1450	134	1930	133
16				1.0	950	139	1200	137
20				Edge Start		600	143	880
25		Edge Start		380	146	540	144	


English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
1/8	0.06	0.15	250	0.2	300	122	360	121	
1/4				0.5	130	127	172	127	
3/8				0.5	80	132	104	131	
1/2					50	135	68	133	
5/8		0.18	300	1.0	38	139	48	137	
3/4				Edge Start		25	142	37	140
7/8				Edge Start		20	144	29	142
1				Edge Start		14	146	20	144

65 A Shielded consumables




220817
Shield




220854
Retaining cap





220819
Nozzle




220842
Electrode



220994
Swirl ring




220817
Shield




220953
Ohmic-sensing
retaining cap




220819
Nozzle



220842
Electrode



220994
Swirl ring



MACHINE TORCH SETUP

65 A Shielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts	
2	1.5	3.8	250	0.1	6050	124	7000	121	
3				0.2	5200	125	6100	123	
4				0.5	4250	125	5100	124	
6					2550	127	3240	127	
8					1700	129	2230	128	
10		4.5	300	0.7	1100	131	1500	129	
12				1.2	850	134	1140	131	
16		6.0	400	2.0	560	138	650	136	
20		Edge Start				350	142	450	142
25						210	145	270	145

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
16GA	0.06	0.15	250	0.1	260	123	294	121	
10GA					190	125	224	123	
3/16				0.2	140	126	168	125	
1/4					0.5	90	127	116	127
3/8						0.7	45	130	62
1/2		0.18	300	1.2	30	135	40	132	
5/8		0.24	400	2.0	23	138	26	136	
3/4		Edge Start				15	141	19	141
7/8						12	143	14	143
1						8	145	10	145

65 A Shielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts	
2	1.5	3.8	250	0.1	8100	125	10000	121	
3				0.2	6700	125	8260	123	
4				0.5	5200	125	6150	124	
6					2450	126	2850	126	
8				0.7	1500	129	1860	129	
10		960	132		1250	132			
12		750	135		920	134			
16		4.5	300	Edge Start		500	139	500	139
20				Edge Start		300	143	370	143

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
16GA	0.06	0.15	250	0.1	345	124	426	121	
10GA					240	125	296	123	
3/16				0.2	155	126	168	125	
1/4					0.5	80	126	96	126
3/8						40	131	52	131
1/2		0.7	26	136	32	135			
5/8			Edge Start		20	139	20	139	
3/4			Edge Start		14	142	15	142	

MACHINE TORCH SETUP

65 A Shielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings			
					Cut Speed	Voltage	Cut Speed	Voltage		
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts		
2	1.5	3.8	250	0.1	8800	121	10300	122		
3				0.2	7400	124	8800	124		
4				0.5	6000	126	7350	125		
6					3200	130	4400	128		
8				0.7	1950	133	2750	130		
10		1200	136		1650	132				
12		1000	138		1330	136				
16		4.5	300	1.2	Edge Start		650	143	800	141
20					380	147	560	145		


English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings			
					Cut Speed	Voltage	Cut Speed	Voltage		
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts		
1/16	0.06	0.15	250	0.1	365	121	428	121		
1/8					280	124	336	124		
1/4					105	131	152	128		
3/8				0.5	50	135	68	131		
1/2					35	139	48	138		
5/8		0.18	300	1.2	Edge Start		26	143	32	141
3/4					16	146	24	144		

45 A Shielded consumables




220817
Shield




220854
Retaining cap





220941
Nozzle




220842
Electrode



220994
Swirl ring




220817
Shield




220953
Ohmic-sensing
retaining cap




220941
Nozzle



220842
Electrode



220994
Swirl ring



MACHINE TORCH SETUP

45 A Shielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
0.5	1.5	3.8	250	0.0	9000	128	12500	126
1					9000	128	10800	128
1.5				0.1	9000	130	10200	129
2					0.3	6600	130	7800
3				0.4		3850	133	4900
4					2200	134	3560	131
6				0.5	1350	137	2050	132

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
26GA	0.06	0.15	250	0.0	350	128	500	128
22GA					350	128	450	128
18GA				0.1	350	129	400	128
16GA					350	130	400	129
14GA				0.2	270	130	320	129
12GA				0.4	190	133	216	131
10GA					100	134	164	131
3/16				0.5	70	135	108	132
1/4				0.6	48	137	73	132

45 A Shielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
0.5	1.5	3.8	250	0.0	9000	130	12500	129
1					9000	130	10800	130
1.5				9000	130	10200	130	
2				6000	132	8660	131	
3				0.4	3100	132	4400	132
4					2000	134	2600	134
6				0.5	900	140	1020	139

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
26GA	0.06	0.15	250	0.0	350	130	500	129
22GA					350	130	450	129
18GA				0.1	350	130	400	130
16GA					350	130	400	130
14GA				0.2	250	132	360	131
12GA				0.4	140	132	206	131
10GA					100	133	134	134
3/16				0.5	52	135	58	135
1/4				0.6	30	141	35	140

MACHINE TORCH SETUP

45 A Shielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
1	1.5	3.8	250	0.0	8250	136	11000	136
2				0.1	6600	136	9200	135
3				0.2	3100	139	6250	134
4				0.4	2200	141	4850	135
6				0.5	1500	142	2800	137

English


Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/32	0.06	0.15	250	0.0	325	136	450	136
1/16				0.1	325	136	400	136
3/32				0.2	200	136	328	134
1/8				0.4	100	140	224	134
1/4				0.5	54	142	96	137

FineCut® consumables

Note: The cut charts in this section apply to both shielded and unshielded consumables.




220948
Shield




220953
Ohmic-sensing
retaining cap




220930
Nozzle




220842
Electrode



220947
Swirl ring




220955
Deflector




220854
Retaining cap




220930
Nozzle



220842
Electrode



220947
Swirl ring



MACHINE TORCH SETUP

FineCut (Mild Steel)

Air flow rate – slpm/scfh	
Hot	181 / 384
Cold	191 / 404

Metric

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended		
						Cut Speed	Voltage	
mm	A	mm	mm	%	seconds	(mm/min)	Volts	
0.5	40	1.5	2.25	150	0.0	8250	78	
0.6						8250	78	
0.8						8250	78	
1	45				0.2	8250	78	
1.5						0.4	6400	78
2							4800	78
3						0.5	2500	78
4						0.6	1900	78

English

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended		
						Cut Speed	Voltage	
	A	inches	inches	%	seconds	ipm	Volts	
26GA	40	0.06	0.09	150	0.0	325	78	
24GA						325	78	
22GA					0.1	325	78	
20GA						325	78	
18GA	45				0.2	325	78	
16GA						0.4	250	78
14GA							200	78
12GA						0.5	120	78
10GA		95	78					

FineCut (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	181 / 384
Cold	191 / 404

Metric

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended	
						Cut Speed	Voltage
mm	A	mm	mm	%	seconds	(mm/min)	Volts
0.5	40	0.5	2.0	400	0.0	8250	68
0.6						8250	68
0.8						8250	68
1	45				0.4	8250	68
1.5						6150	70
2						4800	71
3						2550	80
4						1050	84

English

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended	
						Cut Speed	Voltage
	A	inches	inches	%	seconds	ipm	Volts
26GA	40	0.02	0.08	400	0.0	325	68
24GA						325	68
22GA					0.1	325	68
20GA						325	68
18GA	45				0.4	325	68
16GA						240	70
14GA						200	70
12GA						120	80
10GA		75	80				

MACHINE TORCH SETUP

Low Speed FineCut (Mild Steel)

Air flow rate – slpm/scfh	
Hot	181 / 384
Cold	191 / 404

Metric

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended							
						Cut Speed	Voltage						
mm	A	mm	mm	%	seconds	(mm/min)	Volts						
0.5	30	1.5	2.25	150	0.0	3800	69						
0.6						3800	68						
0.8						3800	70						
1 *	40				1.5	2.25	150	0.2	3800	72			
1.5 *									3800	75			
2	45							1.5	2.25	150	0.4	3700	76
3												2750	78
4											0.6	1900	78

English

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended				
						Cut Speed	Voltage			
	A	inches	inches	%	seconds	ipm	Volts			
26GA	30	0.06	0.09	150	0.0	150	70			
24GA						150	68			
22GA					0.1	150	70			
20GA						150	71			
18GA	40				0.06	0.09	150	0.2	150	73
16GA *									0.4	150
14GA *	0.5							150		76
12GA								120	78	
10GA								95	78	

*Not a dross-free cut.

Low Speed FineCut (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	181 / 384
Cold	191 / 404

Metric

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended		
						Cut Speed	Voltage	
mm	A	mm	mm	%	seconds	(mm/min)	Volts	
0.5	30	0.5	2.0	400	0.0	3800	69	
0.6						3800	69	
0.8						3800	69	
1	40				0.15	3800	69	
1.5						0.4	2900	69
2							2750	69
3	45				0.5	2550	80	
4						0.6	1050	80


English

Material Thickness	Current	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Recommended		
						Cut Speed	Voltage	
	A	in	in	%	seconds	ipm	Volts	
26GA	30	0.02	0.08	400	0.0	150	69	
24GA						150	69	
22GA						150	69	
20GA	40				0.1	150	69	
18GA						0.2	145	69
16GA							0.4	115
14GA	110				69			
12GA	45				0.5	120	80	
10GA		0.6	75	80				

105 A Unshielded consumables




220955
Deflector



220854
Retaining cap




220990
Nozzle



220842
Electrode



220994
Swirl ring



105 A Unshielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	4.6	9.2	200	0.5	4040	148	4980	145
8					3160	149	3770	145
10					2350	150	2700	145
12				1700	153	2080	147	
16				0.6	980	155	1200	152
20				1.0	742	155	940	154
25		Edge Start			500	159	580	159
30					300	161	370	160
32					260	169	270	167
35					320	164	350	163
40	160				176	190	172	

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/4	0.18	0.36	200	0.5	153	148	188	145
3/8					91	150	112	145
1/2					62	153	76	148
5/8				0.6	39	155	48	152
3/4				1.0	31	155	40	153
7/8				1.25	25	156	30	158
1		Edge Start			19	160	22	159
1-1/8					14	161	17	160
1-1/4	13				164	14	163	

MACHINE TORCH SETUP

105 A Unshielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	4.6	9.2	200	0.5	4970	145	6120	142
8					3420	147	4210	144
10					2090	149	2570	146
12					1410	151	1740	149
16				0.75	880	153	1080	151
20				1.0	660	156	800	155
25		Edge Start			420	159	500	159
30		Edge Start			330	162	370	161
32		Edge Start			300	163	320	162

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/4	0.18	0.36	200	0.5	185	145	228	142
3/8					88	149	108	145
1/2					52	151	64	149
5/8					0.75	35	153	43
3/4				1.0	28	155	34	154
7/8				Edge Start			22	157
1		Edge Start			16	159	19	159
1-1/8		Edge Start			14	161	16	161

105 A Unshielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	217 / 460
Cold	250 / 530


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
6	4.6	9.2	200	0.5	5840	148	7170	149
8				0.75	4110	152	5060	151
10					2670	154	3580	153
12				1.0	2090	155	2450	154
16					1330	160	1660	158
20				1.3	980	163	1190	162
25		Edge Start			660	167	770	167
30				500	170	590	169	
32	450			171	520	170		

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/4	0.180	0.36	200	0.5	218	149	268	149
3/8				0.75	110	154	136	153
1/2					1.0	77	156	91
5/8				51		160	66	158
3/4				1.25	41	162	50	161
7/8					Edge Start		33	165
1		25	167	29			167	
1-1/8		20	169	25			169	

85 A Unshielded consumables

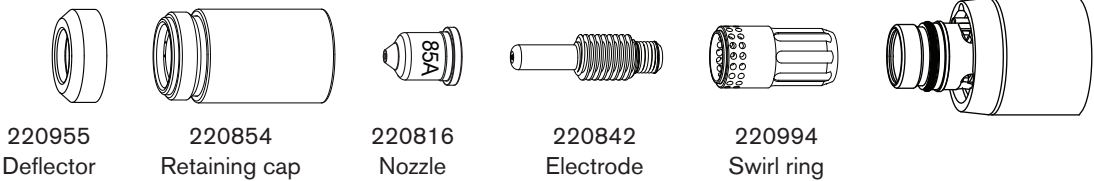

85 A Unshielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
2	2.0	5.0	250	0.0	7150	117	10400	116
3				0.1	6240	118	9000	117
4				0.2	5250	118	7200	117
6				0.5	3450	120	4400	119
8					2400	121	3100	121
10		1560	123	2070	122			
12		6.0	300	0.7	1200	126	1600	124
16		Edge Start			820	132	930	128
20					540	137	640	132
25					320	143	400	137

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
14GA	0.08	0.20	250	0.1	280	117	416	116
10GA				0.2	230	118	328	117
3/16					175	119	220	118
1/4				0.5	125	120	160	119
3/8					65	122	86	122
1/2		0.24	300	0.6	42	127	56	125
5/8		Edge Start			33	131	37	128
3/4					23	136	27	131
7/8					18	140	21	134
1					12	144	15	138

MACHINE TORCH SETUP

85 A Unshielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts	
2	2.0	5.0	250	0.1	8550	117	11300	116	
3					7000	118	9660	117	
4				5600	118	7800	118		
6				3400	120	4570	121		
8		6.0	300	0.5	2250	121	2970	122	
10					1430	123	1840	124	
12		Edge Start				1000	129	1340	128
16						650	134	730	133
20						360	138	570	137

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings		
					Cut Speed	Voltage	Cut Speed	Voltage	
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts	
14GA	0.08	0.20	250	0.1	340	117	452	116	
10GA					250	118	352	118	
3/16				180	119	249	119		
1/4				120	120	160	121		
3/8		0.24	300	0.5	60	122	77	123	
1/2					35	131	46	129	
5/8		Edge Start				26	134	29	133
3/4						17	137	24	136

85 A Unshielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	194 / 412
Cold	236 / 500


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
2	2.0	5.0	250	0.1	8700	118	11200	118
3					7350	120	9600	119
4				6000	122	8100	120	
6				0.5	3300	125	4930	122
8					2350	127	3250	124
10		6.0	300		1800	128	2140	127
12				1300	133	1720	130	
16		Edge Start			840	139	1130	134
20		Edge Start			470	144	700	138

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/8	0.08	0.20	250	0.2	280	120	368	119
3/16					200	123	271	120
1/4				0.5	110	126	172	122
3/8					75	127	88	126
1/2					45	135	62	131
5/8		Edge Start			34	139	45	134
3/4		Edge Start			22	143	32	137

65 A Unshielded consumables

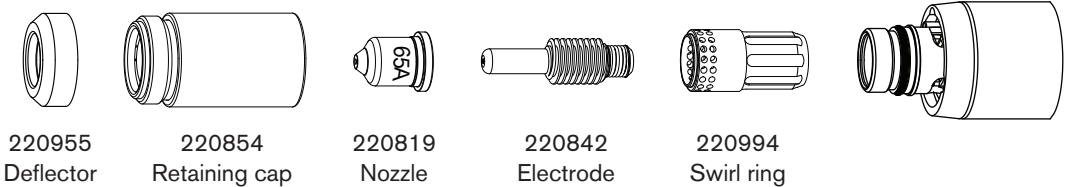

65 A Unshielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
2	2.0	5.0	250	0.1	6050	117	7340	117
3				0.2	5200	118	6330	118
4				0.5	4250	118	5250	118
6					2550	120	3560	120
8		1620	123	2230	121			
10		6.0	300	0.7	970	127	1500	122
12		Edge Start			760	129	1140	124
16					500	134	650	129
20					280	138	400	133

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
16GA	0.08	0.20	250	0.1	255	116	308	117
10GA					190	118	232	118
3/16				0.2	135	119	172	119
1/4					90	120	116	120
3/8		0.24	300	0.7	40	126	62	122
1/2		Edge Start			27	130	40	125
5/8					20	134	26	129
3/4					13	137	18	132

MACHINE TORCH SETUP

65 A Unshielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
2	2.0	5.0	250	0.1	7950	117	10300	116
3				0.2	6600	118	8500	117
4				0.5	5050	119	6500	119
6					2300	121	3070	121
8				0.7	1400	123	1900	122
10		6.0	300	0.7	920	126	1250	123
12		Edge Start			710	130	925	127
16					430	135	500	133

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
16GA	0.08	0.20	250	0.1	340	116	437	115
10GA					235	118	304	118
3/16				0.2	150	120	194	120
1/4					0.5	75	121	100
3/8		0.24	300	0.7	38	125	52	122
1/2		Edge Start			25	132	32	129
5/8					17	135	20	133

65 A Unshielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	175 / 370
Cold	209 / 443


Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
2	2.0	5.0	250	0.1	7750	123	11300	122
3				0.2	6550	124	9500	123
4				0.5	5400	125	7640	124
6					3000	127	3900	126
8		0.7	1800	130	2460	127		
10		6.0	300	0.7	1100	133	1640	129
12		Edge Start			900	135	1250	133
16					600	139	700	136

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/16	0.08	0.20	250	0.1	325	122	476	122
1/8					250	124	360	123
3/16					175	125	245	124
1/4				0.5	100	127	128	126
3/8		0.24	300		0.7	45	132	68
1/2		Edge Start			32	136	44	134
5/8					24	138	28	136

45 A Unshielded consumables

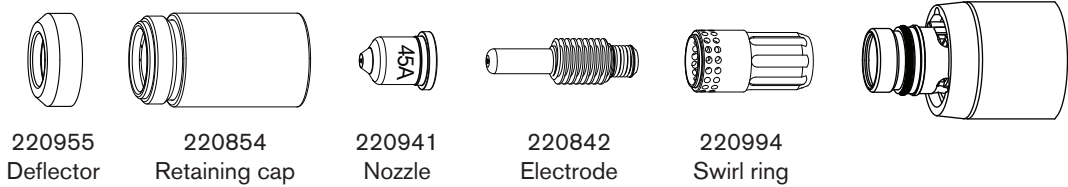

45 A Unshielded cutting (Mild Steel)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
0.5	1.5	3.8	250	0.0	9000	120	12500	120
1					9000	120	10800	121
1.5				0.1	7700	120	10200	121
2					6150	119	7800	122
3				0.4	3950	121	4900	123
4					2350	123	3560	124
6				0.5	1400	126	2050	124

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
26GA	0.06	0.15	250	0.0	350	120	500	120
22GA					350	120	450	120
18GA				0.1	350	119	400	121
16GA					300	121	400	121
14GA				0.2	250	119	320	122
12GA				0.4	200	120	216	123
10GA					100	123	164	124
3/16				0.5	85	122	108	124
1/4				0.6	48	127	73	124

MACHINE TORCH SETUP

45 A Unshielded cutting (Stainless Steel)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
0.5	1.5	3.8	250	0.0	9000	121	12500	119
1					9000	121	10800	119
1.5				0.1	9000	121	10200	120
2					0.3	6000	122	9600
3				0.4		3250	123	4750
4					1900	128	3000	122
6				0.5	700	130	1450	124

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
26GA	0.06	0.15	250	0.0	350	120	500	119
22GA					350	120	450	119
18GA				0.1	350	118	400	119
16GA					350	121	400	120
14GA				0.2	300	122	400	120
12GA					0.4	150	121	224
10GA				100		125	140	121
3/16				0.5	42	131	88	123
1/4				0.6	25	130	48	124

45 A Unshielded cutting (Aluminum)

Air flow rate – slpm/scfh	
Hot	177 / 376
Cold	201 / 427

Metric

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
mm	mm	mm	%	seconds	(mm/min)	Volts	(mm/min)	Volts
1	1.5	3.8	250	0.0	7400	126	11000	121
2				0.1	4400	127	9200	123
3				0.2	2800	129	6250	125
4				0.4	2100	132	4700	126
6				0.5	1050	135	2250	127

English

Material Thickness	Torch-to-Work Distance	Initial Pierce Height		Pierce Delay Time	Best Quality Settings		Production Settings	
					Cut Speed	Voltage	Cut Speed	Voltage
inches	inches	inches	%	seconds	ipm	Volts	ipm	Volts
1/32	0.06	0.15	250	0.0	325	126	450	121
1/16				0.1	200	126	400	122
3/32				0.2	150	127	328	124
1/8				0.4	100	130	224	125
1/4				0.5	36	136	72	127